




Version 1.0

Leica Rugby 870/880 Quick Start

- when it has to be **right**



Rugby 880




RUGBY 880

SER NR: 15048802500
SW: 2.0.3204
HOURS: 0000

X+ 0.000%
Y+ 0.000%



Rugby 870



RUGBY 870

SER NR: 15048702500
SW: 2.0.3204
HOURS: 0000

X+ 0.000%




Rugby 870 X-axis grade entry




RUGBY 870


X+ 0.000%



X+ 0.000%




X+ 1.250%




RUGBY 870


X+ 1.250%

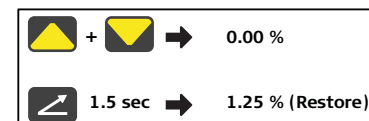

Rugby 880 X-axis grade entry

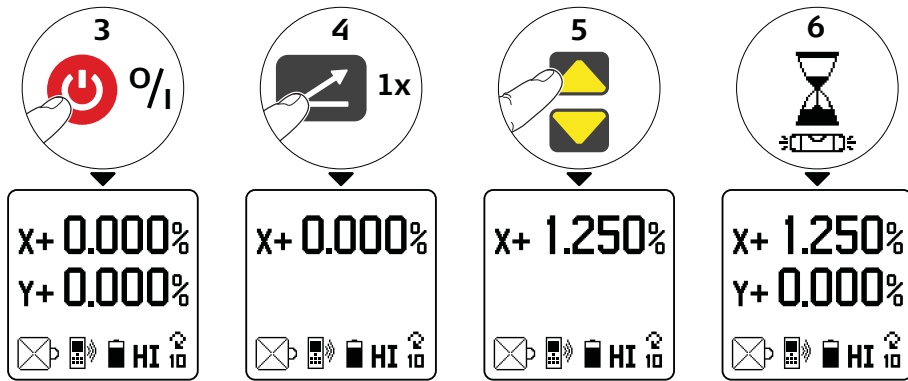


Grade entry by digit

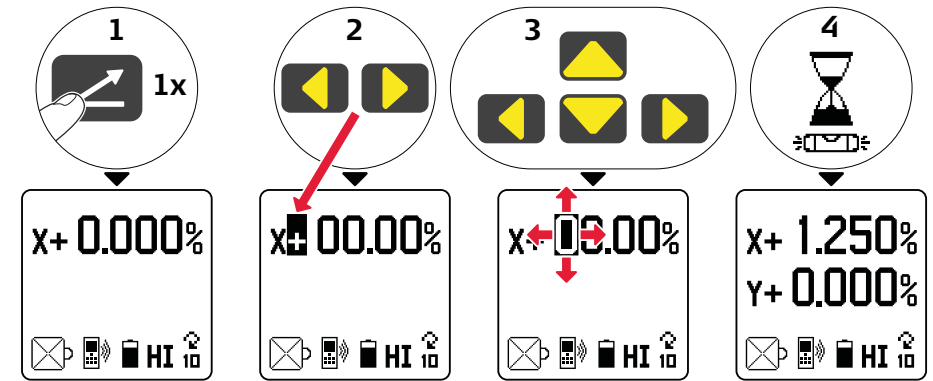


Section 3.4

Rugby 880 Y-axis grade entry

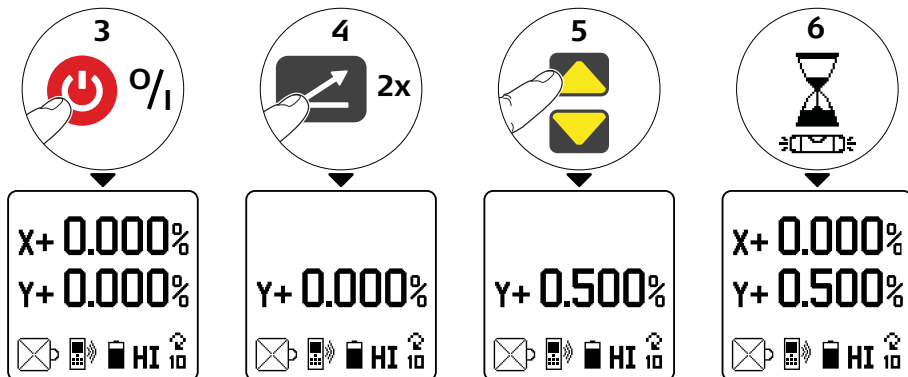


Rugby Menu

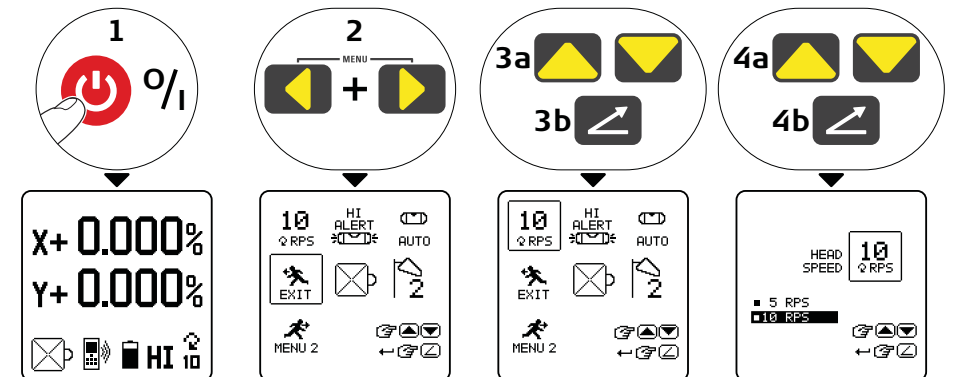


Section 6.0

Beam Masking

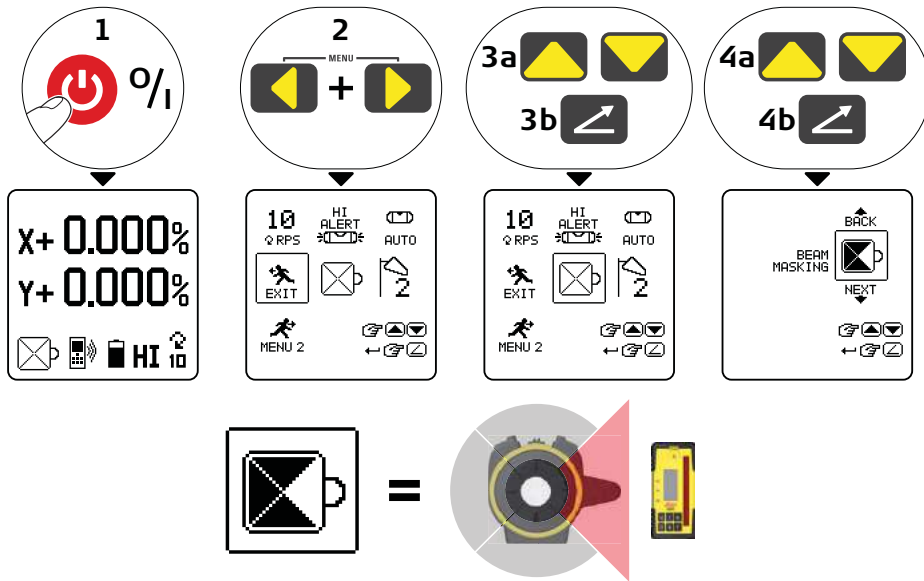


Batteries

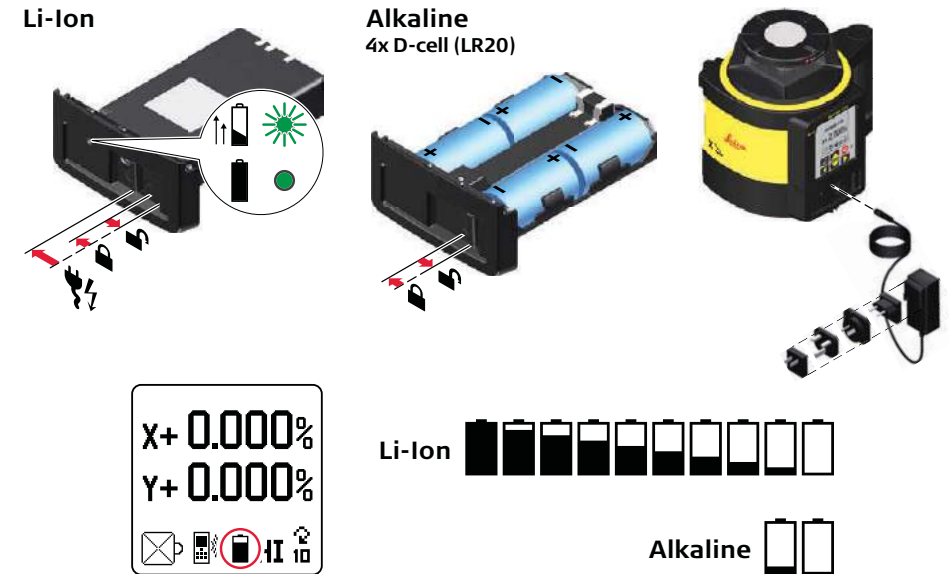


Alerts

TEMPERATURE ALERT



> +50°C < -20°C


H.I. ALERT



① %

② check HI

TEMPERATURE CHECK ALERT



~ 2 min

Rod Eye 140, Classic



%



±1 mm, ±2 mm, ±3 mm



Rod Eye 160, Digital



%



±0.5 mm, ±1 mm, ±2 mm, ±3 mm, ±5 mm



1x 022

Rod Eye 180, Digital RF



	%
	±0.5 mm, ±1 mm, ±2 mm, ±3 mm, ±5 mm
1x	mm 022
1.5 s	Smart Target SMT ▶ XSC
5 s	Smart Target Lock SML ▶ XSL ▶ LOC



Rod Eye 180 and RC800 Remote Batteries and Pairing



Alkaline
2x AA-cell
(LR6)



Alkaline
2x AA-cell
(LR6)

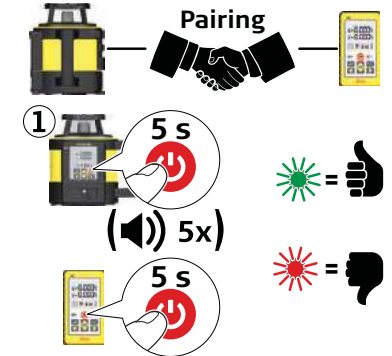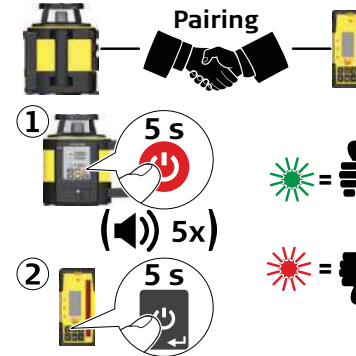

RC800 Remote Control




Section 4.0 / 7.0

	%
	2h
1.5 s	


Setting Forms

X+ 0.000%
Y+ 0.000%
 HI 10

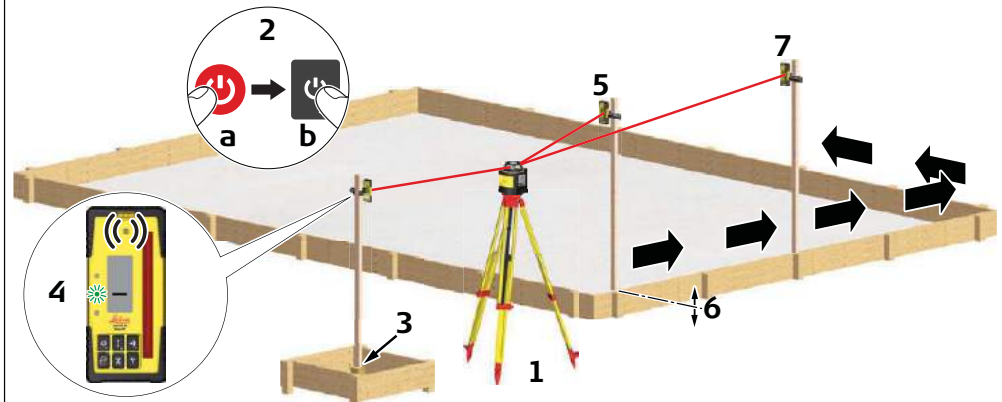


Section 8.1

Checking Grades

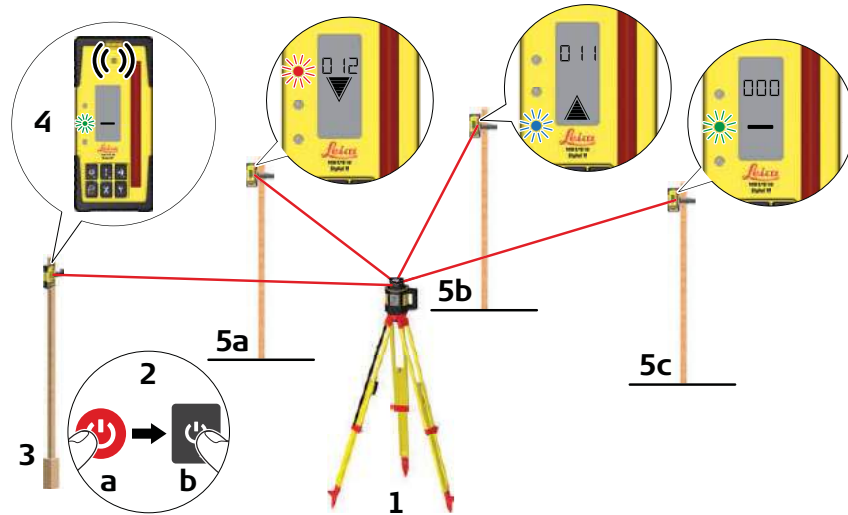


Section 8.2

Automatic Axis Alignment, Rod Eye 180 Digital RF

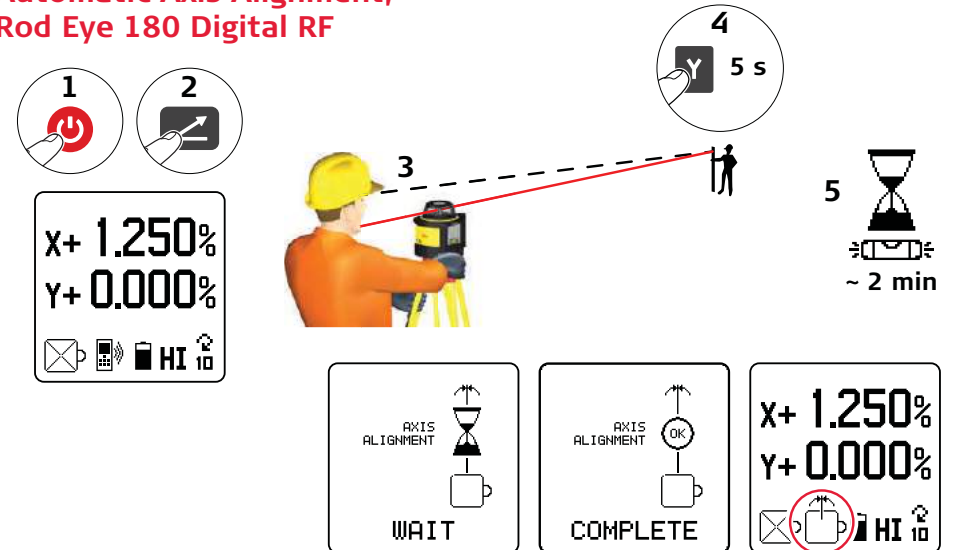

Section 8.6

Smart Target, Rod Eye 180 Digital RF

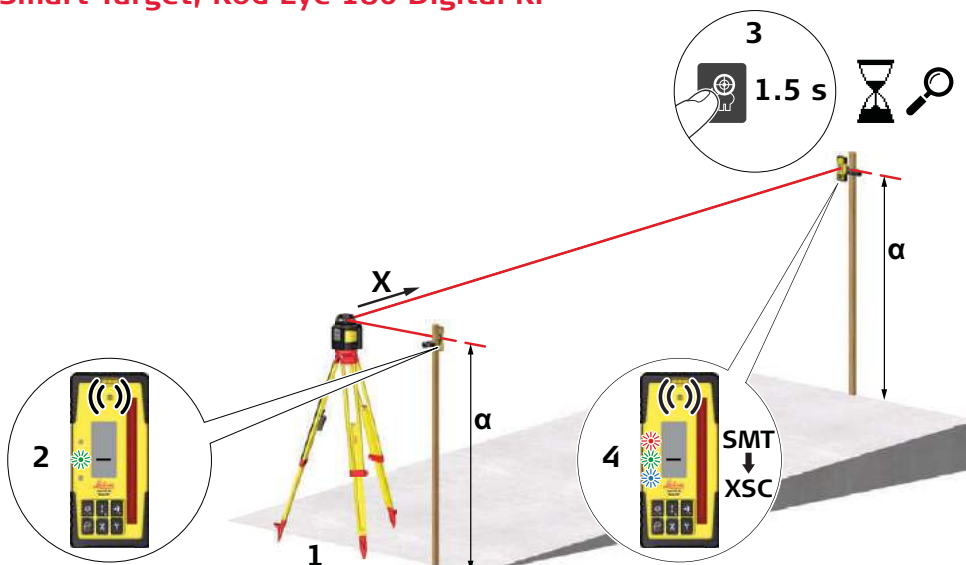

Section 8.4 / 8.5



Laser class 1 product in accordance with IEC 60825-1 (2014-05)

Leica Geosystems AG
Heinrich-Wild-Strasse
CH-9435 Heerbrugg
Switzerland
Phone +41 71 727 31 31
www.leica-geosystems.com

- when it has to be **right**

Leica
Geosystems

804346-1.0.0
Original text
© 2014 Leica Geosystems AG, Heerbrugg, Switzerland